




IMPAL4

Product Specifications

Housing: Die-cast aluminum base, corrosion-resistant polyester powder coat finished UV-resistant prism Polycarbonate (PC) diffuser aluminum heat sink
Mounting: Post Top Mounting three stainless steel set screws for connecting the housing to pole.
Electrical: AC 90-277v
Wattage: 45W /60W
Finish: BLACK
Certification: cETLus, IP66, CE
System Light Efficiency: > 100 lm/W AC90-277V
IP Grade: IP65
Color Temperature: 4000K、 5000K、 6000K
Applicable places: Squares,avenues,pedestrian street, parking lots etc.

Dimensional Drawings:

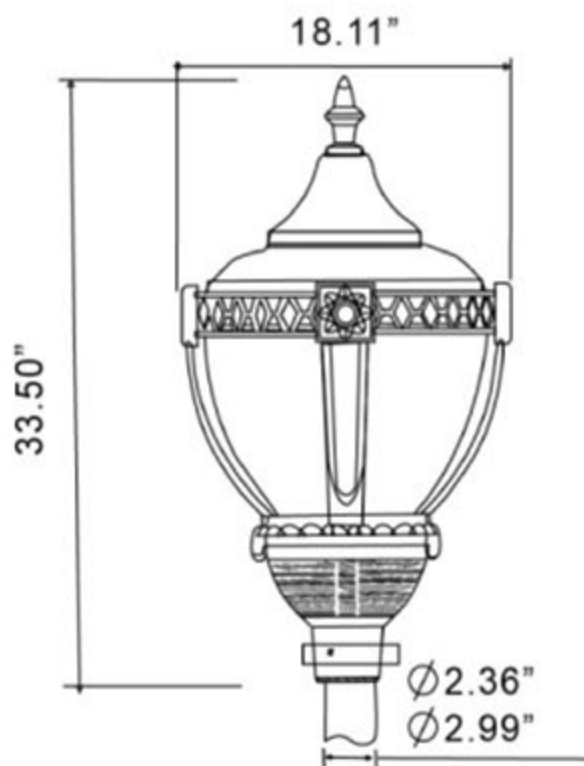

Ordering information

Example:IMPAL4-34-LED-45-U-40-BK

Series	Source	Wattage	Voltage	CCT	Finish	Options
IMPAL4	LED=LED	45=45W 60=60W	U=AC90-277V	40=4000K 50=5000K 60=6000K	BK=(Black)	

*Consult Factory regarding availability.

