





Product Specifications

- Housing:** Die cast aluminum housing.
Driver housing separate from LED's for cool operation.
Adjustable housing for precise aiming.
- Wattage:**15W/20W
- Lens:** Tempered glass
- Mounting:** Wall mount or surface mount
- Light Source:** LED
- Finish:** Bronze powder coat finish is standard
- Certification:** UL/cUL for Wet location, IP66, Lighting Facts

FL02

Dimensional Drawings:

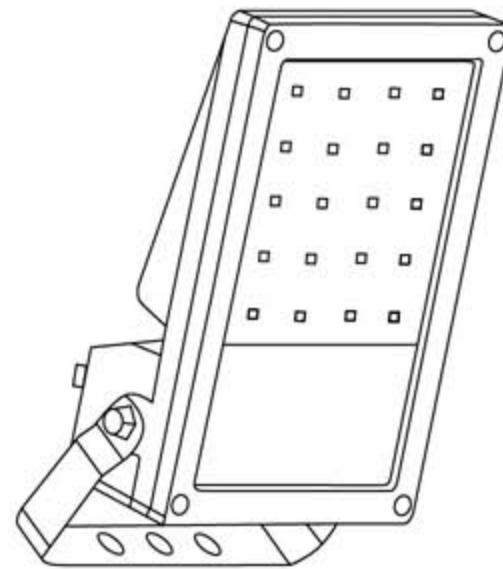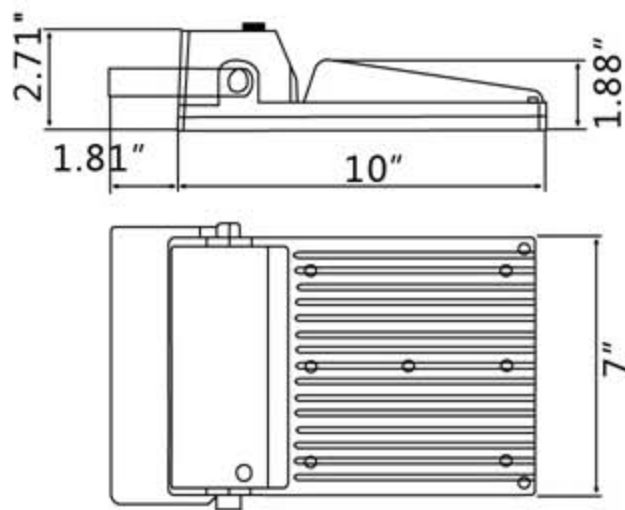

Ordering information

Example:FL02-7-LED-15-U-30-B-PC

Series	Source	Wattage	Voltage	CCT	Finish	Options
FL02	LED=LED	15=15W 20=20W	U=U (120 thru 277)	30=(3000K) 40=(4000K) 50=(5000K)	B= (Bronze) W*=(White) BK*=(Black) SL*=(Silver)	PC= PC PH= Photo CO= Control (120v only)

*Consult Factory regarding availability.

